




 **proline**
PVC Systems for Windows and Doors

“widen your horizon”

TECHNICAL CATALOGUE 2013

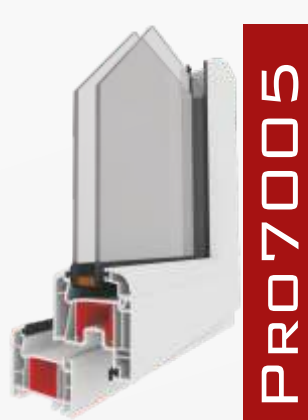

Why?

60 mm width and improved durability with wall thickness in European Standards.
 Perfect heat and noise insulation with 3 chambers and perfect water disposal channels
 Lower inventory cost with one-type support plate and one-type seal
 Perfect and aesthetic design which appeals to every taste with decorative and self-sealed bars.
 Perfect world-class design which compatible with all domestic and international accessories.
 Perfect compatibility with all series.

Technical Specifications


1. 60 mm profile width
2. 3 chambers system which improves insulation and durability
3. Decorative glazing bead
4. 45° chamfered external wall which prevents dust and dirt and provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. 3mm - 32mm glass application possibility
8. One-type support plate
9. One-type seal
10. Unlimited color options for coating

Color Options




Certificates




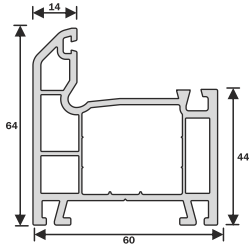


PRO51 - Kasa Profili
Frame Profile

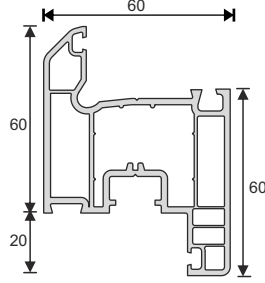


PRO52 - Kanat Profili
Sash Profile

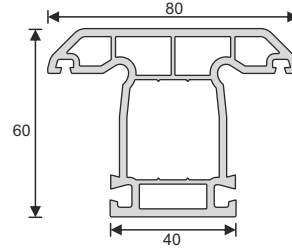


PRO53 - Orta Kayıt Profili
Mullion Profile

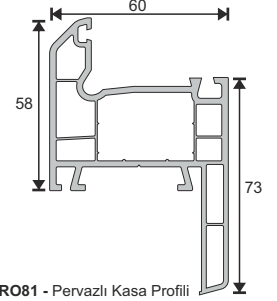


PRO81 - Pervazlı Kasa Profili
Frame Profile with Cornice

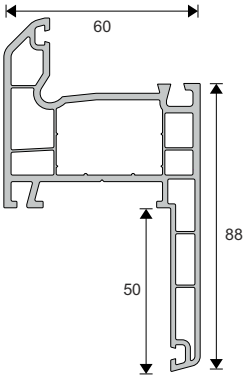


PRO82 - Pervazlı Kasa Profili Duvar Contalı
Frame Profile with Cornice with Wall Gaset

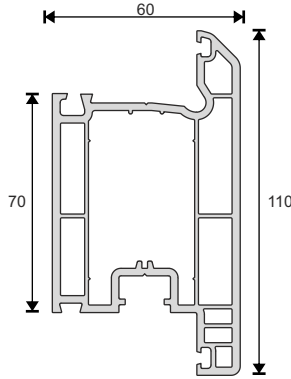


PRO10 - T Kapı Profili
T Door Profile

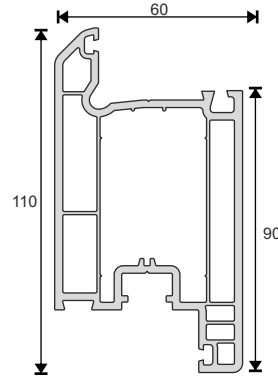


PRO10 - Z Kapı Profili
Z Door Profile

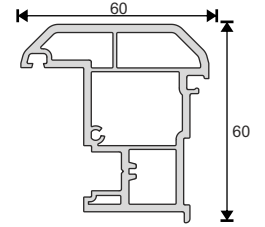


PRO12 - Hareketli Orta Kayıt Profili
False Mullion Profile

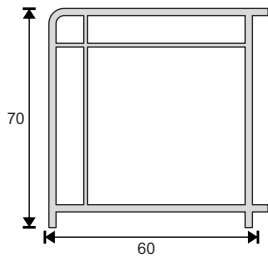


PRO36 - 60x60 Kutu Profili
60x60 Box Profile




PRO38 - Tırnaklı Pervaz
Tabbed Cornice Profile

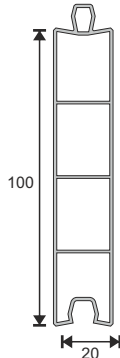


PRO30 - Lambri
Panel Lambri Profile

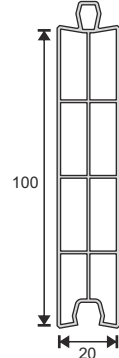


PRO30-2 - Lambri
Panel Lambri Profile




PRO06 - Tekcam Çıta 4-6
4-6 mm Single Glass G.Bead




PRO08 - Çiftcam Çıta 24-26
24-26 mm Double Glass G.Bead




PRO40 - T Pervaz Everest
T Cornice Profile

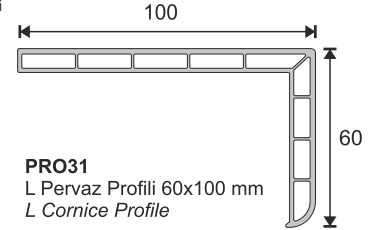


PRO31
L Pervaz Profili 60x100 mm
L Cornice Profile

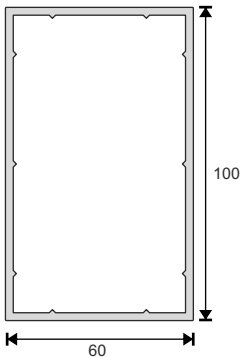


PRO37 - 60x100 Kutu Profili
60x100 Box Profile




PRO32 - Köşe Dönüş Borusu
Corner Turning Pipe




PRO33 - Köşe Dönüş Adaptörü
Corner Turning Adapter




PRO34 - Bağ Profili
Coupling Profile



PRO05 - Çiftcam Çıta 20-22
20-22 mm Double Glass G.Bead



PRO14 - Yükseltme Profili 30mm
Rising Profile 30mm



PRO07 - Üçlücam Çıta
28-30 mm Triple Glass G.Bead

Why?

60 mm width and improved durability with wall thickness in European Standards.
 Perfect heat and noise insulation with 4 chambers and perfect water disposal channels
 Lower inventory cost with one-type support plate and one-type seal
 Perfect and aesthetic design which appeals to every taste with decorative and self-sealed bars.
 Perfect world-class design which compatible with all domestic and international accessories.
 Perfect compatibility with all series.

Technical Specifications


1. 60 mm profile width
2. 4 chambers system which improves insulation and durability
3. Decorative glazing bead
4. 45° chamfered external wall which prevents dust and dirt and provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. 3mm - 32mm glass application possibility
8. One-type support plate
9. One-type seal
10. Unlimited color options for coating

Color Options




Certificates




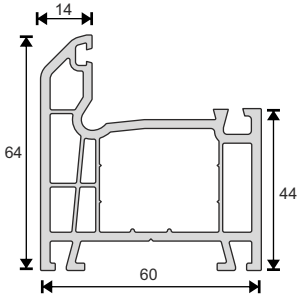


PRO01 - Kasa Profili
Frame Profile

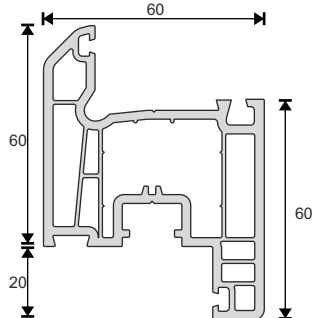


PRO02 - Kanat Profili
Sash Profile

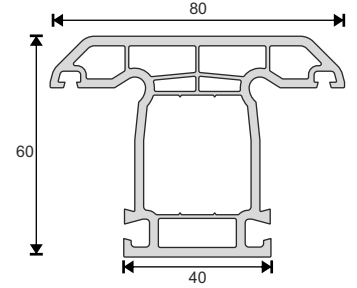


PRO03 - Orta Kayıt Profili
Mullion Profile

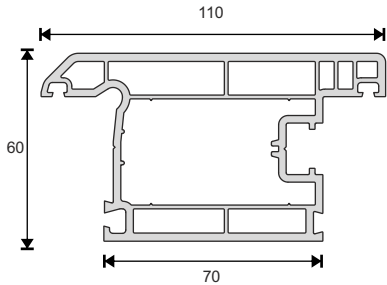


PRO10 - T Kapı Profili
T Door Profile

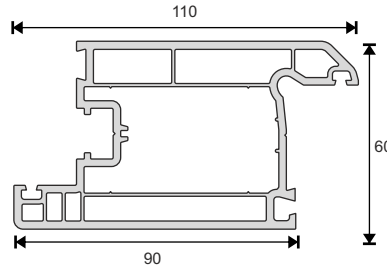


PRO10 - Z Kapı Profili
Z Door Profile

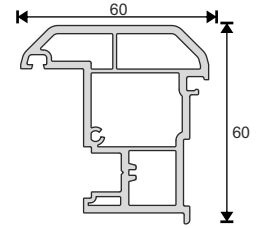


PRO12 - Hareketli Orta Kayıt Profili
False Mullion Profile

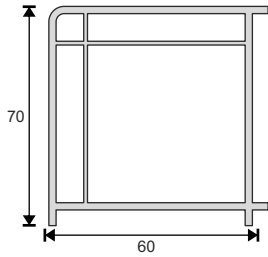


PRO36 - 60x60 Kutu Profili
60x60 Box Profile




PRO38 - Tırnaklı Pervaz
Tabbed Cornice Profile

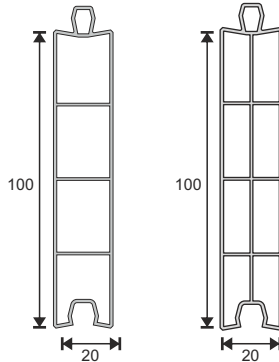


PRO30 - Lambri
Panel Lambri Profile

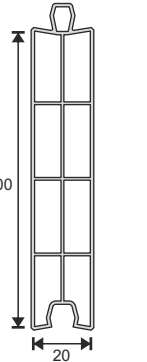


PRO30-2 - Lambri
Panel Lambri Profile




PRO06 - Tekcam Çıta 4-6
4-6 mm Single Glass G.Bead




PRO08 - Çiftcam Çıta 24-26
24-26 mm Double Glass G.Bead

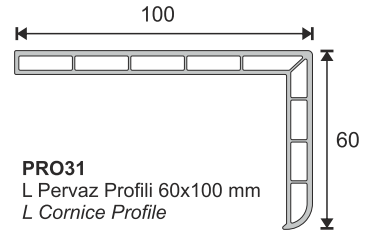


PRO31
L Pervaz Profili 60x100 mm
L Cornice Profile




PRO40 - T Pervaz Everest
T Cornice Profile

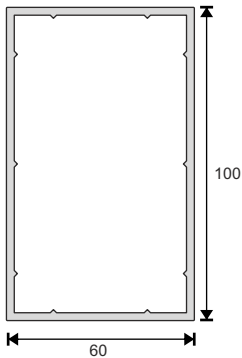


PRO37 - 60x100 Kutu Profili
60x100 Box Profile




PRO32 - Köşe Dönüş Borusu
Corner Turning Pipe




PRO33 - Köşe Dönüş Adaptörü
Corner Turning Adapter




PRO34 - Bağ Profili
Coupling Profile



PRO05 - Çiftcam Çıta 20-22
20-22 mm Double Glass G.Bead



PRO14 - Yükseltme Profili 30mm
Rising Profile 30 mm



PRO07 - Üçlücam Çıta
28-30 mm Triple Glass G.Bead

Why?

70 mm width and improved durability with wall thickness in European Standards.
 Perfect heat and noise insulation with 5 chambers and perfect water disposal channels
 Lower inventory cost with one-type support plate and one-type seal
 Perfect and aesthetic design which appeals to every taste with decorative and self-sealed bars.
 Perfect world-class design which compatible with all domestic and international accessories.
 Perfect compatibility with all series.

Technical Specifications


1. **70 mm** profile width
2. **5 chambers system** which improves insulation and durability
3. Decorative glazing bead
4. 45° chamfered external wall which prevents dust and dirt and provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. **3mm - 32mm** glass application possibility
8. One-type support plate
9. One-type seal
10. Unlimited color options for coating

Color Options




Certificates




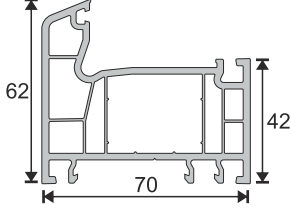


PRO711
70 mm L Kasa
70 mm L Frame Profile

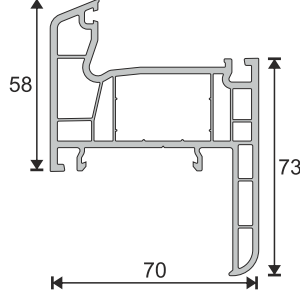


PRO714
70 mm Pervazlı L Kasa
70 mm L Frame Profile with Cornice

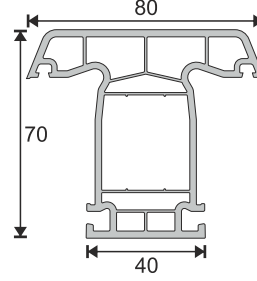


PRO713
70 mm Orta Kayıt Profili
70 mm T Mullion Profile

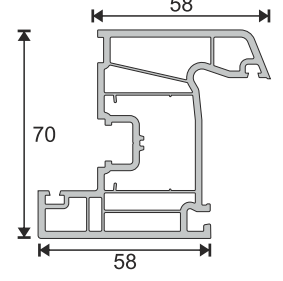


PRO712
70 mm Kanat Profili
70 mm Z Sash Profile

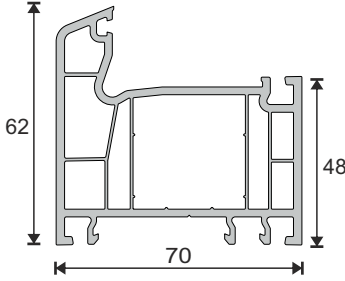


PRO710
70 mm L Kasa 48
70 mm L Frame Profile H:48

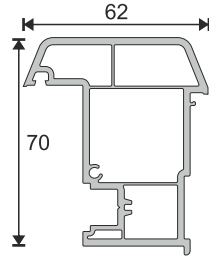


PRO717
70 mm Hareketli Orta Kayıt
70 mm False Mullion Profile

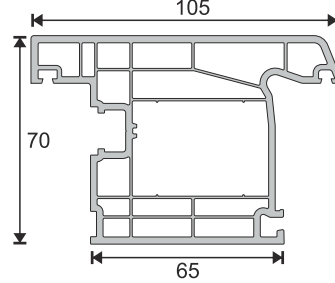


PRO716
70 mm Dış Açılım Kapı Profili
70 mm Out Door Profile

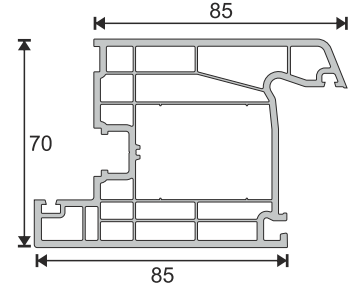


PRO715
70 mm Kapı Profili
70 mm Door Profile

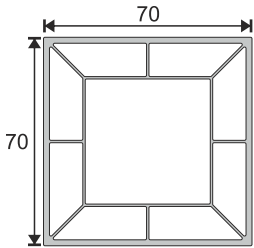


PRO80
70x70 mm Kutu Profili
70x70 mm Box Profile




PRO32
Köşe Dönüş Boru Profili
Corner Turning Pipe

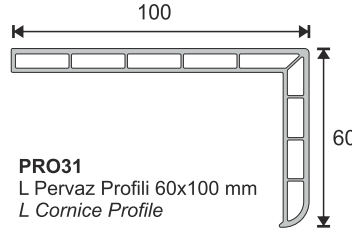


PRO31
L Pervaz Profili 60x100 mm
L Cornice Profile




PRO700
4-6 mm Tekcam Çıta
4-6 mm Single Glass Gazing Bead

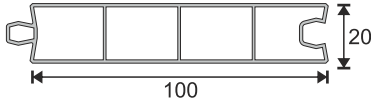


PRO30
Panel Lambri - Tek Odalı
Panel Lambri Profile




PRO33-1
Köşe Dönüş Adaptör Profili 70 mm
Corner Turning Adapter




PRO701
20-22 mm Çiftcam Çıta Profili
20-22 mm Double Glass G.bead



PRO702
24-26 mm Çiftcam Çıta
24-26 mm D.Glass Gazing Bead

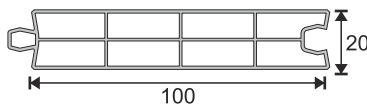


PRO30-2
Panel Lambri - Çift Odalı
Panel Lambri Profile




PRO79
Bağ Profili 70 mm
Coupling Profile


PRO35
T Pervaz Profili
T Cornice Profile



PRO38
Tırnaklı Pervaz Profili
Tabbed Cornice Profile



PRO39
Çakma Pervaz - 10X35 mm
Cornice Profile 10x35 mm




Why?

Special design which allows every project
3 chambers which improve durability and European-Standard wall thickness and therefore functional and strong structure which allows usage of same sash in door and window.
Perfect world-class design which compatible with all domestic and international accessories.
Perfect compatibility with all series.

Technical Specifications


1. **48 mm** sash width
2. **70 mm** frame width
3. Decorative glazing bead
4. 45° chamfered external wall which prevents dust and dirt and provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. **3mm - 32mm** glass application possibility
8. One type support plate
9. Unlimited color options

Color Options

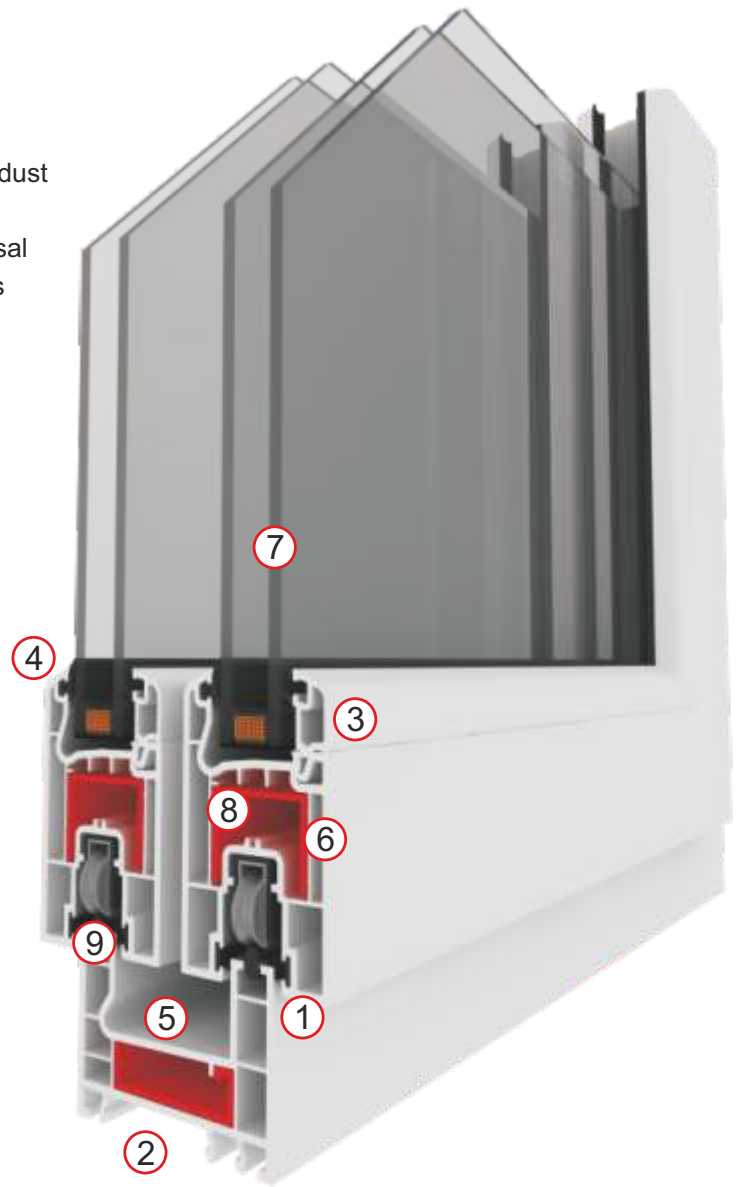


Certificates




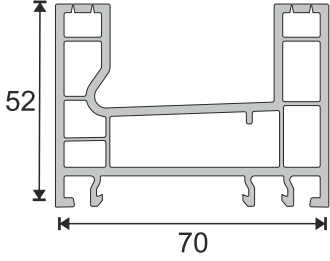


PRO201
Sürme Kasa Profili 70 mm
Sliding Door Frame Profile

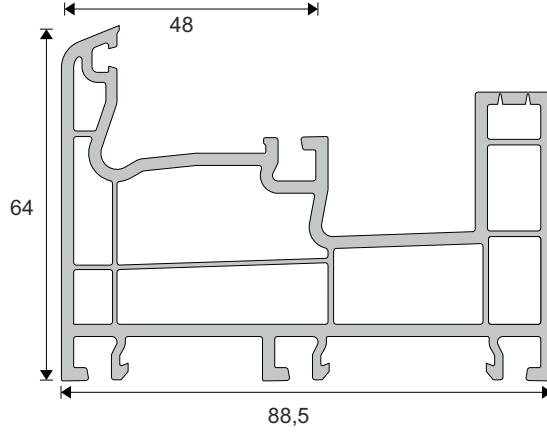


PRO231
Sürme Sabit Kasa Profili
Fixed Sliding Frame Profile

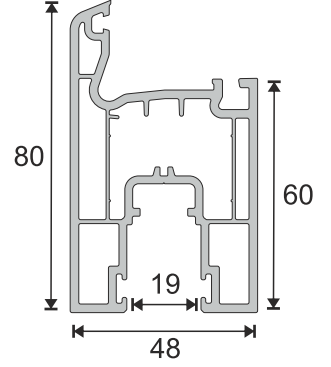

PRO211
Sürme Kanat Profili
Sliding Door Sash Profile

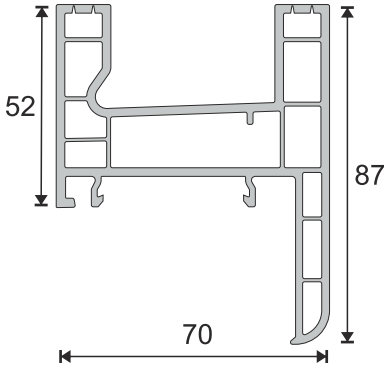


PRO202
Sürme Pervazlı Kasa Profili 70 mm
Sliding Door Frame Profile with cornice





PRO35
T Pervaz Profili
T Cornice Profile


PRO703
Sürme Çift Cam Çita Profili
Double Glass G.B. for Sliding System




PRO701
Sürme Tek Cam Çita Profili
Single Glass G.B. for Sliding Syst.




PRO39
Çakma Pervaz - 10X35 mm
Cornice Profile 10x35 mm




PRO38
Tırnaklı Pervaz Profili
Tabbed Cornice Profile




PRO204
Sürme Adaptör Profili
Sliding Door Sash Adapter




PRO33-1
Köşe Dönüş Adaptör Profili 70 mm
Corner Turning Adapter




PRO79
Bağ Profili 70 mm
Coupling Profile




PRO32
Köşe Dönüş Boru Profili
Corner Turning Pipe



PRO30
Panel Lambri - Tek Odalı
Panel Lambri Profile

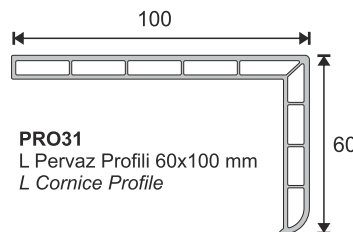

PRO31
L Pervaz Profili 60x100 mm
L Cornice Profile

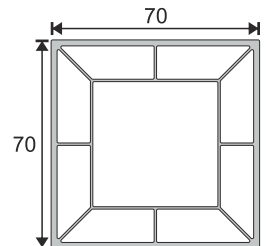

PRO80
70x70 mm Kutu Profili
70x70 mm Box Profile



“widen your horizon”



Factory

Merkez Mah. 89.Sk. No:2 Sasali - Cigli / IZMIR / TURKEY
+90 232 327 3133 (PBX)
+90 232 327 3171
info@prolinepvc.com | www.prolinepvc.com

Certificates



info@prolinepvc.com | www.prolinepvc.com